
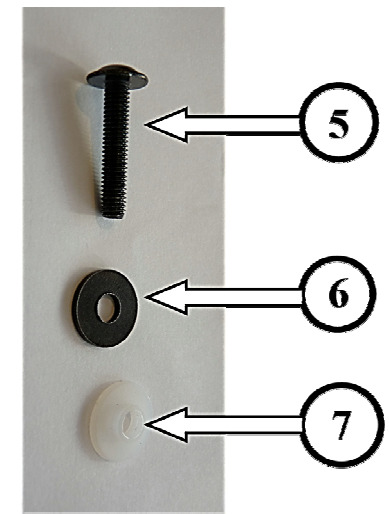


**Yamaha Tricity 125-150 (2014-2017)**

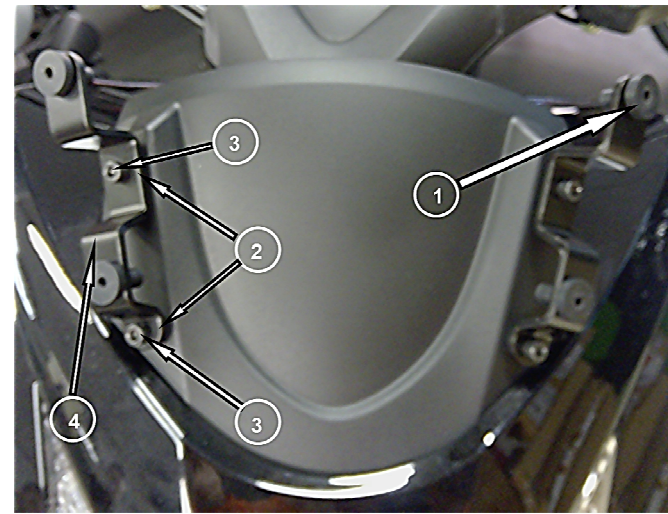

**MONTAGGIO:** Smontare il cupolino originale, inserire a pressione le 4 boccole fomite (pos. 2) nelle loro sedi, fissare i pistrini mediante la bulloneria originale (pos. 3) facendo attenzione che il fissaggio inferiore dello schermo sia rivolto verso la mezzeria veicolo; inserire i wellnut (pos. 1) e procedere al fissaggio della lastra tramite rondella con collare, rondella metallica nera e vite M5x25 (come illustrato in figura)

**FITTING:** dismount the original screen and put the provided 4 little (pos.2) bushes in their rooms; fit the brackets using the original bolts (pos.3) and check if the lower fixation is in internal position; add four wellnut (pos.1) and fit the screen with plastic collar washer, metallic washer and bolt M5x25 (see the picture above)

Wellnut	4	1
Boccola metallica / Bush	4	2
Vite M6x30 originale / M6x30 original bolt	4	3
Piastra di supporto / Bracket	2	4
Vite M5x25 / Bolt M5x25	4	5
Rondella metallica / Metallic washer	4	6
Distanziale in plastica / Plastic spacer	4	7